
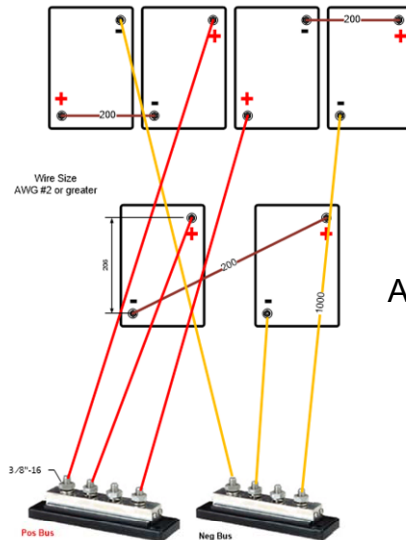
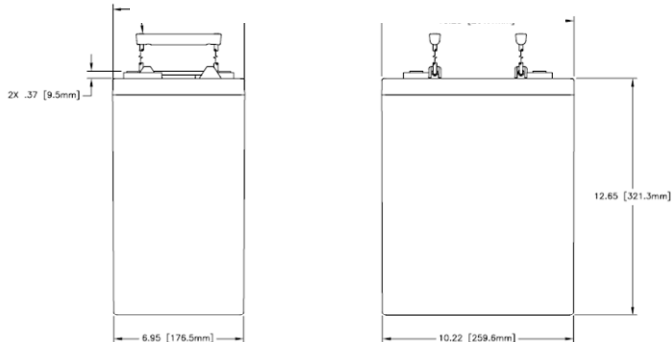
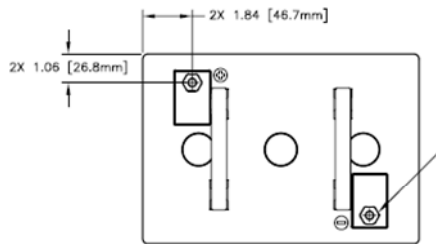


GOOD FIT  
270mm clearance max

Installation Order: 4,6,3,1,2,5  
Serial Pairs: 1&2, 3&4, 5&6

Aluminum Battery Tray located under  
cabin sole below companionway steps.

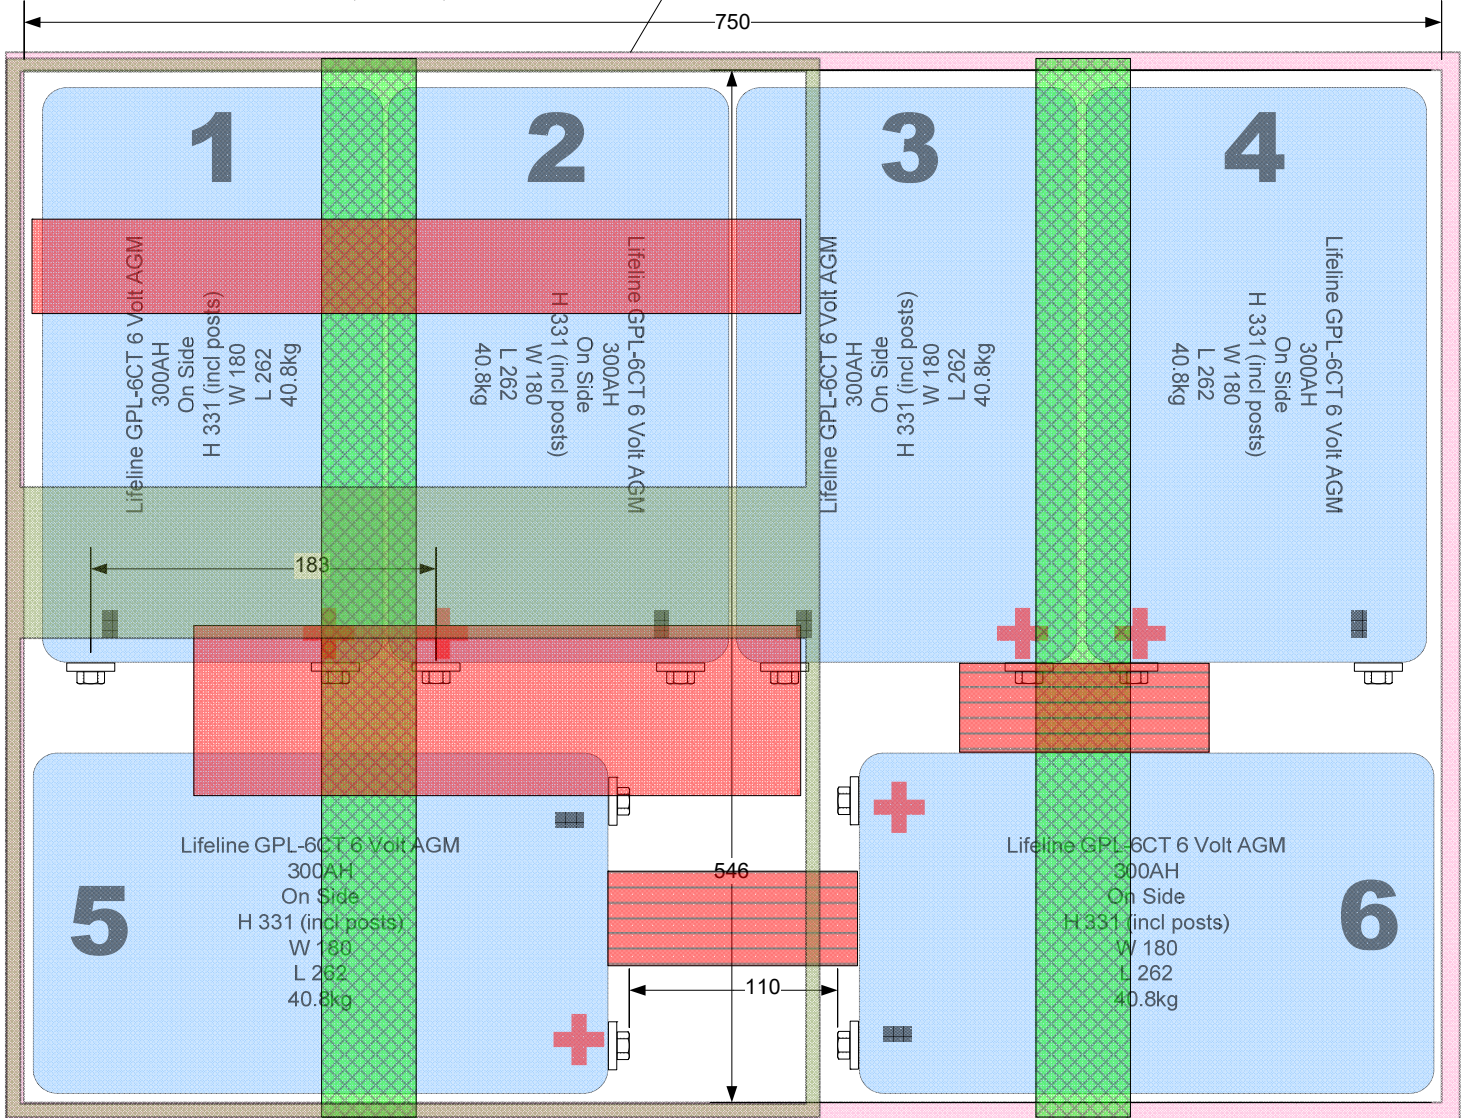

Wire Size  
AWG #2 or greater

SV BEATRIX - KELLY-PETERSON 44 #286 (1980)

TITLE

Main Battery Bank Design - 900AH GPL-6CT-6V (3P2S 6v 300AH)

REV	SCALE	PAGE	DATE	DRAWN BY
E	1:4	2 OF 36	28/06/19	JEFF